



Auxano Solar PV Module

Auxano solar Nig., Ltd.

www.auxanosolar.com

info@auxanosolar.com

07067956193



MONO CRYSTALLINE SOLAR MODULES

(100W- 380W)

POLY CRYSTALLINE SOLAR MODULES

(100W- 330W)



Durability against severe environmental conditions:

High salt mist and ammonia resistance.



Low-light Performance:

Excellent performance in low-light environments.



High Efficiency:

Higher module conversion efficiency, through refined innovative technology.



Severe Weather Resilience:

Capability to withstand: wind load and rain load.


AUXANO SOLAR PERFORMANCE WARRANTY

■ Auxano Solar performance warranty

■ Standard performance warranty

10-Year Product warranty

25- Year Product warranty

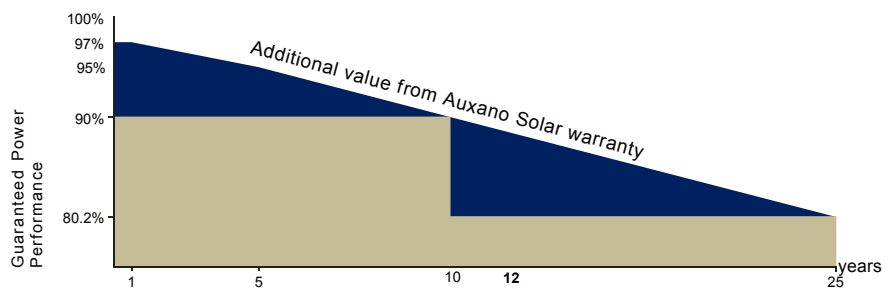

Monocrystalline Solar PV Module Parameters Table

Model	Maximum Power	Voltage at maximum Power	Current at maximum Power	Open Circuit Voltage	Short Circuit Voltage	Module Efficiency (%)	Dimension (mm)	Net Weight	Maximum System Voltage (V)	Packing	
	Pmax (Watts)	Vmpp (V)	Imp (A)	Voc (V)	Isc (A)		L*W*H	(Kgs)		QTY/CTN	Weight (Kgs)
M100	100	18.70	5.40	23.09	5.87	16.00	1200*670*35	8	1000	2	16.80
M135	135	18.24	7.41	22.80	8.10	16.17	1200*670*35	8.2	1000	2	16.80
M150	150	18.00	8.33	22.50	9.00	15.13	1200*670*35	10	1000	2	20.40
M200-48C	200	36.00	5.56	45.00	6.00	15.30	1320*992*35	16	1000	2	32.60
M250-48C	250	24.42	10.25	29.61	10.46	19.03	1320*992*35	16	1000	2	32.80
M250-60C	250	36.00	6.94	45.00	7.50	16.51	1640*992*35	18	1000	2	36.80
AUX260	260	30.10	8.67	36.21	8.86	17.75	1640*992*35	18	1000	2	36.80
AUX270	270	31.20	8.71	38.21	9.44	17.91	1640*992*35	18	1000	2	36.80
AUX280	280	30.61	9.16	37.21	9.38	18.96	1640*992*35	18	1000	2	36.80
AUX300	300	32.60	9.20	40.1	9.92	18.84	1640*992*35	18	1000	2	36.80
M300-72C	300	37.00	8.11	45.10	8.76	16.49	1956*992*35	22	1000	2	44.80
AUX-310-60C	310	34.52	8.98	39.73	9.42	19.29	1640*992*35	18	1000	2	36.80
AUX-320-72C	320	36.10	8.89	44.32	9.12	19.35	1956*992*40	22	1000	2	44.80
AUX-340-72C	340	38.70	8.79	46.10	9.42	17.52	1956*992*40	22	1000	2	44.80
AUX-345-72C	345	38.50	8.96	46.70	9.55	17.90	1956*992*40	22	1000	2	44.80
AUX-350-72C	350	39.10	8.94	47.10	9.60	18.20	1956*992*40	22	1000	2	44.80
AUX-360-72C	360	39.00	9.24	47.71	9.70	18.5	1956*992*40	22	1000	2	44.80
AUX-365-72C	365	39.30	9.30	48.00	9.77	18.80	1956*992*40	22	1000	2	44.80
AUX-370-72C	370	39.70	9.33	48.30	9.83	19.07	1956*992*40	22	1000	2	44.80
AUX-375-72C	375	40.00	9.37	48.30	9.85	19.23	1956*992*40	22	1000	2	44.80
AUX-380-72C	380	40.31	9.42	48.71	10.00	19.80	1956*992*40	22	1000	2	44.80

* REMARKS: Products specification are subject to change without notice.

Polycrystalline Solar PV Module Parameters Table

Model	Maximum Power	Voltage at maximum Power	Current at maximum Power	Open Circuit Voltage	Short Circuit Voltage	Module Efficiency (%)	Dimension (mm)	Net Weight	Maximum System Voltage (V)	Packing	
	Pmax (Watts)	Vmpp (V)	Ipp (A)	Voc (V)	Isc (A)		L*W*H	(Kgs)		QTY/CTN	Weight (Kgs)
M100	100	18.01	5.56	21.81	6.05	15.03	1200*670*35	8	1000	2	16.80
M135	135	18.30	7.56	22.20	8.08	15.09	1200*670*35	8	1000	2	16.80
P150	150	18.31	8.20	22.65	8.84	15.13	1480*670*35	10	1000	2	20.40
P160	160	26.35	6.07	32.40	6.49	15.30	1480*670*35	10	1000	2	20.40
P170	170	26.35	6.45	32.41	6.90	15.41	1480*670*35	10	1000	2	20.40
P180	180	26.35	6.83	32.40	7.31	15.62	1480*670*35	10	1000	2	20.40
P200	200	28.90	6.93	36.20	7.68	16.24	1640*992*35	18	1000	2	36.80
P210	210	28.90	7.26	36.41	7.91	16.23	1640*992*35	18	1000	2	36.80
P220	220	29.30	7.52	36.61	8.09	16.24	1640*992*35	18	1000	2	36.80
P230	230	29.80	7.71	36.81	8.34	16.41	1640*992*35	18	1000	2	36.80
P240	240	30.41	7.91	37.01	8.61	16.49	1640*992*35	18	1000	2	36.80
60C-AUX-250P	250	30.45	8.21	36.54	9.44	15.80	1640*992*35	22	1000	2	44.80
60C-AUX-260P	260	31.20	8.34	38.10	9.03	16.01	1640*992*35	22	1000	2	44.80
60C-AUX-270P	270	31.71	8.52	38.81	9.20	16.63	1640*992*35	22	1000	2	44.80
72C-AUX-300P	300	36.70	8.10	45.60	8.86	16.32	1956*992*40	22	1000	2	44.80
72C-AUX-320P	320	37.10	8.63	45.50	9.16	16.50	1956*992*40	22	1000	2	44.80
72C-AUX-325P	325	37.4	8.70	45.70	9.22	16.70	1956*992*40	22	1000	2	44.80
72C-AUX-330P	330	37.70	8.76	45.90	9.27	17.00	1956*992*40	22	1000	2	44.80

* REMARKS: Products specification are subject to change without notice.